


# Fastenal Product Standard: FNL.SAE.PLUG.CSK.H.YZ

## SAE, Plug, Countersunk Hex, Male NPTF, Yellow Zinc

The information below lists the required dimensional, chemical and physical characteristics of the products in this purchase order. If the order received does not meet these requirements, it may result in a supplier corrective action request, which could jeopardize your status as an approved vendor. Unless otherwise specified, all referenced consensus standards must be adhered to in their entirety.

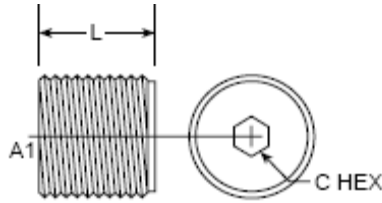

Tube OD	A1	Hex Recess Min	C	L
	Male NPTF		WAF +/- 0.010	OAL +/- 0.02
1/16	1/16-27	0.12	0.156	0.300
1/8	1/8-27	0.12	0.188	0.300
1/4	1/4-18	0.19	0.250	0.460
3/8	3/8-18	0.19	0.312	0.460
1/2	1/2-14	0.25	0.375	0.610
3/4	3/4-14	0.31	0.562	0.620
1	1-11 1/2	0.38	0.625	0.770
1-1/4	1 1/4-11 1/2	0.42	0.750	0.830

### Specification Requirements:

- Standard for Dimension: SAE J531(130109 N-R)
- Material: Carbon Steel per SAE J531
- Thread Requirements: NPTF Per ASME B1.20.3
- Finish: ASTM B 633, type II, Fe/Zn5 (SC1)